


HYGOOD DATA SHEET

Description: FM-200® Modular Unit (1.2L)

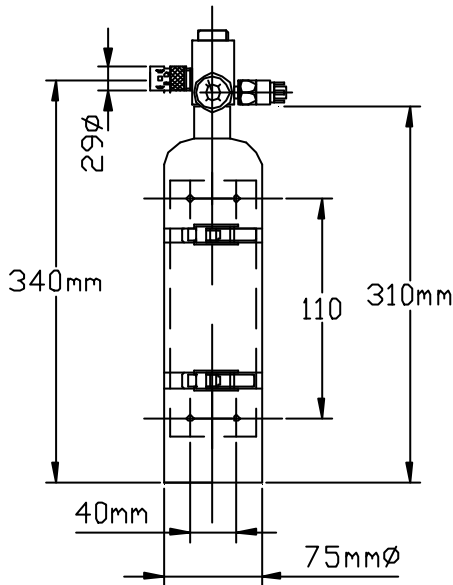

TERMINAL	CORRECT CONTAINER PRESSURE	LOW CONTAINER PRESSURE
EARTH	EARTH	EARTH
1	COMMON	COMMON
2	NORMALLY OPEN	NORMALLY CLOSED
4	NORMALLY CLOSED	NORMALLY OPEN


Specification:	Valve Body: Brass CZ121 Thread Type: M30 x 1.5 Valve Outlet: 1/2" BSP Nozzle Size: 15mm Nozzle Type: 7 Port 180° Nozzle Drill Size: 6.4mm Cylinder Volume: 1.2L Nominal Cylinder Diameter: 75mm Cylinder Material: Aluminium Cylinder Pressure: 15 bar Cylinder Test Pressure: 40.3 bar Cylinder Burst Pressure: 206.8 bar Agent Type: FM-200® Agent Fill Weight: 1.0kg Propellant: Nitrogen Low Pressure Switch Setting: 10 bar falling Low Pressure Switch Contacts: Normally Open / Normally Closed Temperature Range: 0 - 50°C Max Volume Coverage: 1.8m ³ @ 7% Design Conc. Area Coverage: 6m Actuation Method: Manual/Pneumatic/Metron/Solenoid/Cable Bracket Type: Floor / Ceiling Mounted Bracket Hole Size: 5mm Dia x 4
-----------------------	---

COMPONENT:	FM-200® Modular Unit (1kg)	PART NO.	9840
SIZE:	1.2L	DATA SHEET NO.	DS 02500
FM-200® FIRE EXTINGUISHING SYSTEM		ISSUE :	B
		REVISION DATE:	03.08.98
		SHEET NO.	1 / 1

HYGOOD RESERVES THE RIGHT TO MAKE ANY ALTERATION WITHOUT PRIOR NOTICE. ALL ISSUES ARE UNCONTROLLED COPIES.

HYGOOD DATA SHEET

Description: FM-200® Modular Unit (2.4L)

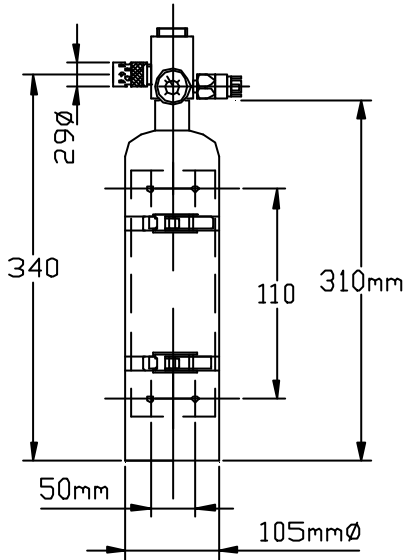

TERMINAL	CORRECT CONTAINER PRESSURE	LOW CONTAINER PRESSURE
EARTH	EARTH	EARTH
1	COMMON	COMMON
2	NORMALLY OPEN	NORMALLY CLOSED
4	NORMALLY CLOSED	NORMALLY OPEN


Specification:	Valve Body: Brass CZ121 Thread Type: M30 x 1.5 Valve Outlet: 1/2" BSP Nozzle Size: 15mm Nozzle Type: 7 Port 180° Nozzle Drill Size: 6.4mm Cylinder Volume: 2.4L Nominal Cylinder Diameter: 105mm Cylinder Material: Aluminium Cylinder Pressure: 15 bar Cylinder Test Pressure: 40.3 bar Cylinder Burst Pressure: 172.4 bar Agent Type: FM-200® Agent Fill Weight: 2.0kg Propellant: Nitrogen Low Pressure Switch Setting: 10 bar falling Low Pressure Switch Contacts: Normally Open / Normally Closed Temperature Range: 0 - 50°C Max Volume Coverage: 3.6m ³ @ 7% Design Conc. Area Coverage: 6m Actuation Method: Manual/Pneumatic/Metron/Solenoid/Cable Bracket Type: Floor / Ceiling Mounted Bracket Hole Size: 5mm Dia x 4
-----------------------	--

COMPONENT:	FM-200® Modular Unit (2kg)	PART NO.	9850
SIZE:	2.4L	DATA SHEET NO.	DS 02510
FM-200® FIRE EXTINGUISHING SYSTEM		ISSUE :	B
		REVISION DATE:	03.08.98
		SHEET NO.	1 / 1

HYGOOD RESERVES THE RIGHT TO MAKE ANY ALTERATION WITHOUT PRIOR NOTICE. ALL ISSUES ARE UNCONTROLLED COPIES.

HYGOOD DATA SHEET

Description: FM-200® Modular Unit (4.3L)

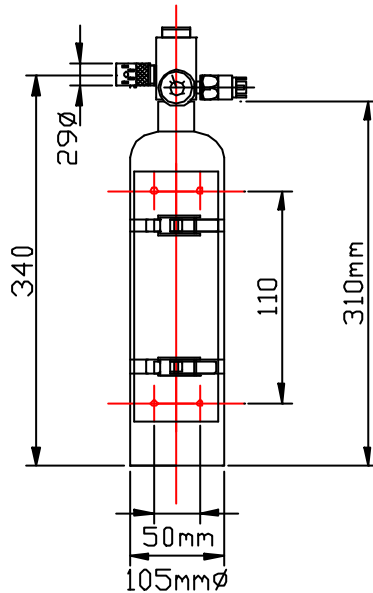

TERMINAL	CORRECT CONTAINER PRESSURE	LOW CONTAINER PRESSURE
EARTH	EARTH COMMON	EARTH COMMON
1	NORMALLY OPEN	NORMALLY CLOSED
2	NORMALLY CLOSED	NORMALLY OPEN
4		

Specification:	Valve Body: Brass CZ121 Thread Type: M30 x 1.5 Valve Outlet: 1/2" BSP Nozzle Size: 15mm Nozzle Type: 7 Port 180° Nozzle Drill Size: 6.4mm Cylinder Volume: 4.3L Nominal Cylinder Diameter: 129mm Cylinder Material: Aluminium Cylinder Pressure: 15 bar Cylinder Test Pressure: 40.3 bar Cylinder Burst Pressure: 172.4 bar Agent Type: FM-200® Agent Fill Weight: 3.0kg Propellant: Nitrogen Low Pressure Switch Setting: 10 bar falling Low Pressure Switch Contacts: Normally Open / Normally Closed Temperature Range: 0 - 50°C Max Volume Coverage: 5m ³ @ 7% Design Conc. Area Coverage: 6m Actuation Method: Manual/Pneumatic/Metron/Solenoid/Cable Bracket Type: Floor / Ceiling Mounted Bracket Hole Size: 5mm Dia x 4
-----------------------	--

COMPONENT:	FM-200® Modular Unit (3kg)	PART NO.	14189
SIZE:	4.3 Litre	DATA SHEET NO.	DS 02515
FM-200® FIRE EXTINGUISHING SYSTEM		ISSUE :	A
		REVISION DATE:	18.04.02
		SHEET NO.	1 / 1