



The simple, clean styling of Aspect is both classic and contemporary, so it looks at home anywhere, in almost any kind of environment where style and quality are important. The profile is just 4mm slim, so it's discrete, as well as stylish, while the concealed screws leave an elegant frontplate, making it more attractive still.

In addition to impressive looks, with Aspect comes unrivalled safety. Utilising MK's unique 3-pin operated safety shutter, that prevents misuse and unsafe access to live circuitry, Aspect offers the user the peace of mind and comfort that they have the safest range of wiring devices available installed in their surroundings.

Slim profile 'screwless' front plates of only 4mm

Provide a clean and flawless look that complements the décor of the finest interiors.

Patented spring clip design


Ensures positive earth connection of the frontplate and end user safety.

Total safety

Unique 3-pin operated "child resistant shutter system", which is designed to inhibit access to the electricity supply, unless all 3 pins of a standard British 13 Amp plug are in position

7 standard high quality finishes with the option for custom design service

Enables Aspect to provide a stylish finish to any new décor.

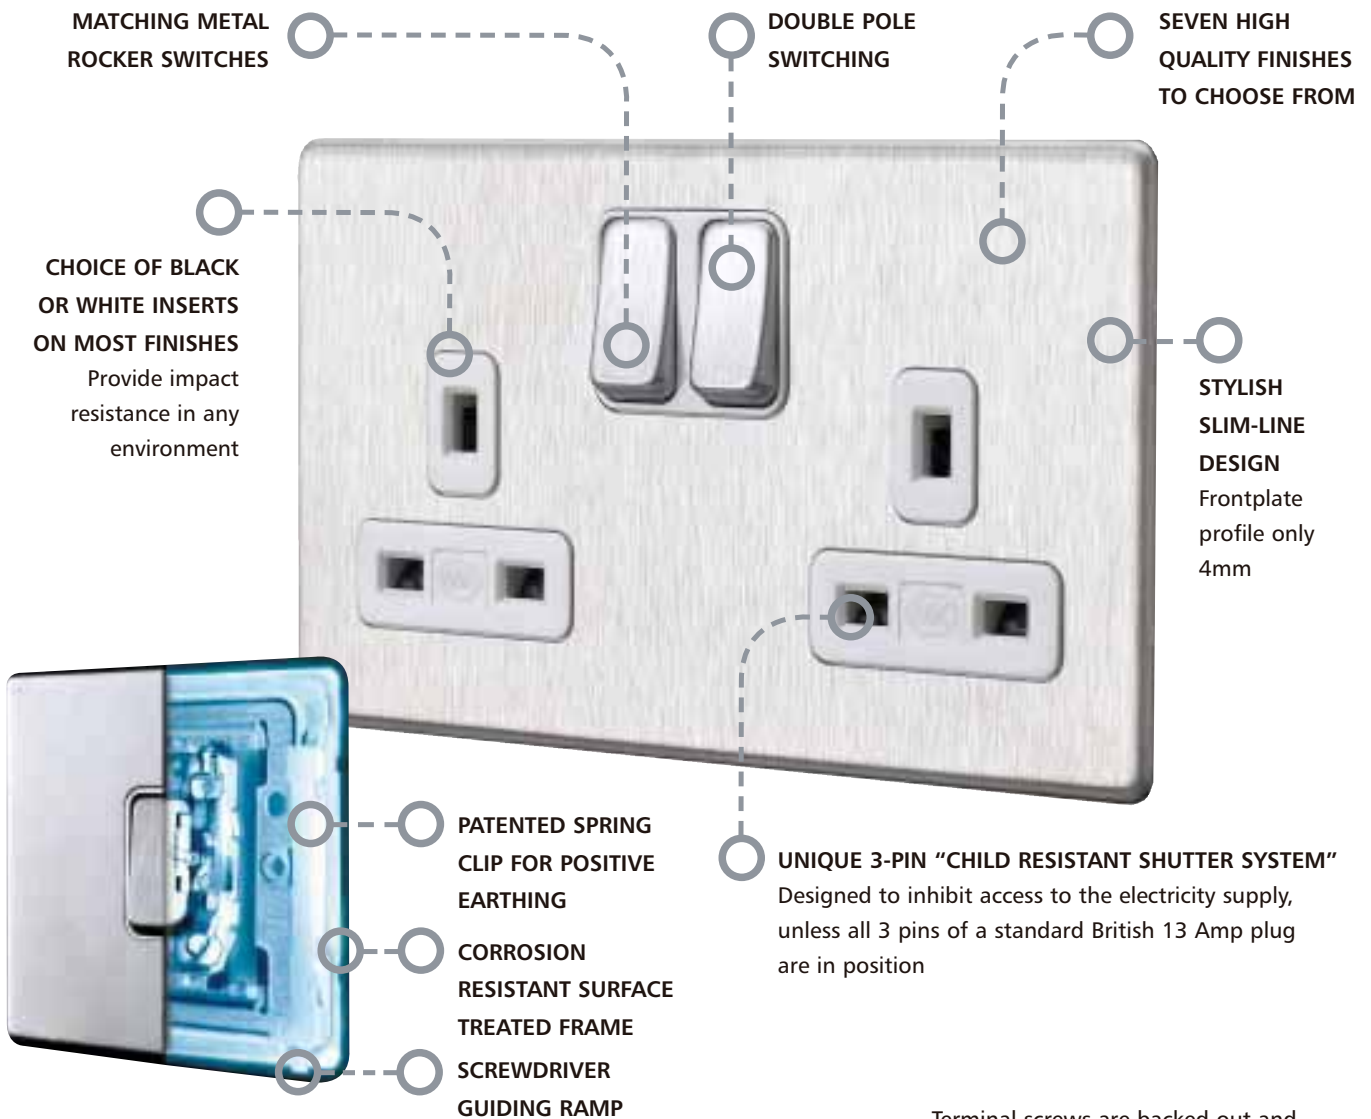

Terminal screws are backed out and captive Terminals are upwards facing to make installation easier.

Funnel entrance to terminals.

Clear terminal markings for easy identification.

As well as a wide choice of finishes new MK Aspect is available in a range of outlets for interactive and digital TV, IT and telecomms services. There are reliable and effective dimmer switches, and a comprehensive range of modular switches – all simple to install.



Switchsocket Outlets

Socket Outlets

1 GANG DP
DUAL EARTH
13 AMP


1 GANG DP
WITH NEON
DUAL EARTH
13 AMP

2 GANG DP
DUAL EARTH
13 AMP

2 GANG DP
WITH NEON
DUAL EARTH
13 AMP

1 GANG DP
ROUND PIN
15 AMP

1 GANG
DUAL EARTH
13 AMP



FINISHES

BRUSHED STAINLESS STEEL	STD	K24357 BSS W	K24657 BSS W	K24347 BSS W	K24647 BSS W	K24383 BSS W	K24780 BSS W
	OPT	K24357 BSS B	K24657 BSS B	K24347 BSS B	K24647 BSS B	K24383 BSS B	K24780 BSS B
POLISHED BRASS	OPT	K24357 PBR W	K24657 PBR W	K24347 PBR W	K24647 PBR W	K24383 PBR W	K24780 PBR W
	STD	K24357 PBR B	K24657 PBR B	K24347 PBR B	K24647 PBR B	K24383 PBR B	K24780 PBR B
POLISHED CHROME	OPT	K24357 POC W	K24657 POC W	K24347 POC W	K24647 POC W	K24383 POC W	K24780 POC W
	STD	K24357 POC B	K24657 POC B	K24347 POC B	K24647 POC B	K24383 POC B	K24780 POC B
WHITE	STD	K24357 WHI W	K24657 WHI W	K24347 WHI W	K24647 WHI W	K24383 WHI W	K24780 WHI W
CHARCOAL	STD	K24357 CHA B	K24657 CHA B	K24347 CHA B	K24647 CHA B	K24383 CHA B	K24780 CHA B
CHAMPAGNE	STD	K24357 CHM W	K24657 CHM W	K24347 CHM W	K24647 CHM W	K24383 CHM W	K24780 CHM W
SATIN CHROME	STD	K24357 SCR W	K24657 SCR W	K24347 SCR W	K24647 SCR W	K24383 SCR W	K24780 SCR W

- W** White Inserts
B Black Inserts
STD Standard Black or
STD White
OPT Option Black or
OPT White

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
 FLUSH 46mm: 877 ZIC
 (for extra wiring space)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 60.3mm

BS.1363 Pt. 2: 1995

Neon is only available
 in white or black rocker.

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
 FLUSH 46mm: 878 ZIC
 (for extra wiring space)

DIMENSIONS:
 86 x 86mm

FIXING CENTRES:
 120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
 FLUSH 47mm: 878 ZIC
 (for extra wiring space)

DIMENSIONS:
 86 x 146mm

FIXING CENTRES:
 120.6mm

BS.1363 Pt. 2: 1995

Neon is only available
 in white or black rocker.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
 FLUSH 47mm: 877 ZIC
 (for extra wiring space)

DIMENSIONS:
 86 x 146mm

FIXING CENTRES:
 60.3mm

BS.546: 1990

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
 FLUSH 47mm: 877 ZIC
 (for extra wiring space)

DIMENSIONS:
 86 x 146mm

FIXING CENTRES:
 60.3mm

BS.1363 Pt. 2: 1995

LEAD TIMES
 Please contact our Customer
 Services Department on:
 01268 563000

Dual Earth

Fitted with two earth terminals to provide a double earth
 facility for use when installations are to comply with
 Section 607 of BS.7671 IEE Wiring Regulations

Dual Earth (see note box)

Dual Earth (see note box)

Dual Earth (see note box)



TECHNICAL HOTLINE +44 (0)1268 563720

DECORATIVE

2 GANG
DUAL EARTH
13 AMP

1 GANG
ROUND PIN
2 AMP

1 GANG
ROUND PIN
5 AMP

FLOOR
SOCKET
1 GANG
13 AMP

FLOOR
SOCKET
2 GANG
13 AMP

GERMAN
2P+E 1 GANG
16 AMP 250V
SHUTTERED
(NON UK)

AMERICAN
1 GANG
15 AMP 127V
SHUTTERED
(NON UK)

UNIVERSAL
SOCKET
1 GANG
16 AMP
(NON UK)

					MODULAR Order plate and insert	MODULAR Order plate and insert	MODULAR Order plate and insert
K24781 BSS W K24781 BSS B	K24380 BSS W K24380 BSS B	K24381 BSS W K24381 BSS B	K24740 BSS W K24740 BSS B	K24742 BSS W K24742 BSS B	K24182 BSS K5831 WHI K5831 BLK	K24182 BSS K5832 WHI K5832 BLK	K24331 BSS K4901 WHI K4901 BLK
K24781 PBR W K24781 PBR B	K24380 PBR W K24380 PBR B	K24381 PBR W K24381 PBR B	K24740 PBR W K24740 PBR B	K24742 PBR W K24742 PBR B	K24182 PBR K5831 WHI K5831 BLK	K24182 PBR K5832 WHI K5832 BLK	K24331 PBR K4901 WHI K4901 BLK
K24781 POC W K24781 POC B	K24380 POC W K24380 POC B	K24381 POC W K24381 POC B	K24740 POC W K24740 POC B	K24742 POC W K24742 POC B	K24182 POC K5831 WHI K5831 BLK	K24182 POC K5832 WHI K5832 BLK	K24331 POC K4901 WHI K4901 BLK
K24781 WHI W	K24380 WHI W	K24381 WHI W	K24740 WHI W	K24742 WHI W	K24182 WHI K5831 WHI	K24182 WHI K5832 WHI	K24331 WHI K4901 WHI
K24781 CHA B	K24380 CHA B	K24381 CHA B	K24740 CHA B	K24742 CHA B	K24182 CHA K5831 WHI	K24182 CHA K5832 WHI	K24331 CHA K4901 WHI
K24781 CHM W	K24380 CHM W	K24381 CHM W	K24740 CHM W	K24742 CHM W	K24182 CHM K5831 BLK	K24182 CHM K5832 BLK	K24331 CHM K4901 BLK
K24781 SCR W	K24380 SCR W	K24381 SCR W	K24740 SCR W	K24742 SCR W	K24182 SCR K5831 BLK	K24182 SCR K5832 BLK	K24331 SCR K4901 BLK

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 877 ZIC
(for extra wiring space)

Rotary operated
shutter.

DIMENSIONS:
102 x 86mm

FIXING CENTRES:
60.3mm

Floor sockets have
fixing screws

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

Rotary operated
shutter.

DIMENSIONS:
102 x 146mm

FIXING CENTRES:
120.6mm

Floor sockets have
fixing screws

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 46mm: 877 ZIC
DIMENSIONS: 86 x
86mm

IEC 60884-1:2002

This is a modular
product. The front plate
(K24182) and socket
(K5831) need to be
ordered separately.

Add appropriate suffix to
the list number.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

SSA.444: 1985

This is a modular
product. The front plate
(K24182) and socket
(K5832) need to be
ordered separately.
Add appropriate suffix to
the list number.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
BS.5733: 1995
Grid Plus frontplates,
supplied with mounting
frame. The Universal
Socket does not
incorporate an earth
contact. Appliances
needing earth connection
(class 1 equipment) must
NOT be used with this
socket. The socket is
intended for use with BS,
USA and CEE plugs.

Dual Earth (see note box)

Shaver Supply Outlets

DUAL VOLTAGE
115/230V
OUTPUT
220/240V
50/60Hz INPUT

DUAL VOLTAGE
115/230V
OUTPUT
120/130V
50/60Hz INPUT
(NON UK)

Connection Units
Switched



DP
13 AMP

DP
WITH NEON
13 AMP

DP WITH NEON
& FLEX OUTLET
13 AMP

Connection Units
Unswitched

WITH NEON
13 AMP



FINISHES

BRUSHED STAINLESS STEEL	STD	K24709 BSS W	K24710 BSS W	K24941 BSS W	K24961 BSS W	K24971 BSS W	K24958 BSS W
	OPT	K24709 BSS B	K24710 BSS B	K24941 BSS B	K24961 BSS B	K24971 BSS B	K24958 BSS B
POLISHED BRASS	OPT	K24709 PBR W	K24710 PBR W	K24941 PBR W	K24961 PBR W	K24971 PBR W	K24958 PBR W
	STD	K24709 PBR B	K24710 PBR B	K24941 PBR B	K24961 PBR B	K24971 PBR B	K24958 PBR B
POLISHED CHROME	OPT	K24709 POC W	K24710 POC W	K24941 POC W	K24961 POC W	K24971 POC W	K24958 POC W
	STD	K24709 POC B	K24710 POC B	K24941 POC B	K24961 POC B	K24971 POC B	K24958 POC B
WHITE	STD	K24709 WHI W	K24710 WHI W	K24941 WHI W	K24961 WHI W	K24971 WHI W	K24958 WHI W
CHARCOAL	STD	K24709 CHA B	K24710 CHA B	K24941 CHA B	K24961 CHA B	K24971 CHA B	K24958 CHA B
CHAMPAGNE	STD	K24709 CHM W	K24710 CHM W	K24941 CHM W	K24961 CHM W	K24971 CHM W	K24958 CHM W
SATIN CHROME	STD	K24709 SCR W	K24710 SCR W	K24941 SCR W	K24961 SCR W	K24971 SCR W	K24958 SCR W

W White Inserts
B Black Inserts
STD Standard Black or White
STD White
OPT Option Black or White
OPT White

MOUNTING BOXES

FLUSH: 878 ZIC

This design incorporates a double wound isolating transformer rated 20VA at 230 or 115 volts and meets BS EN 61558-2-5: 1996 making it safe for use in bathrooms.

Insertion of a shaver plug automatically switches on by energising the primary side of the isolating transformer – removal automatically switches off. The transformer is protected against overload by an automatic solid state overload device with automatic resetting.

Front plate 7mm thick to allow fixing to 47mm deep box

DIMENSIONS: 146 x 86mm
FIXING CENTRES: 120.6mm
BS EN 61558-2-5: 1998

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13 amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

BS. 1363 Pt. 4: 1995

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13 amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

Neon is only available in white or black rocker.

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13 amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

Neon is only available in white or black rocker.

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13 amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

BS. 1363 Pt. 4: 1995

LEAD TIMES
Please contact our Customer Services Department on: 01268 563000

Switches

WITH NEON & FLEX OUTLET 13 AMP	1 GANG SP 2 WAY 20 AMP	2 GANG SP 2 WAY 20 AMP	1 GANG DP WITH NEON 45 AMP
--------------------------------------	------------------------------	------------------------------	----------------------------------

K24978 BSS W K24978 BSS B	K24371 BSS W K24371 BSS B	K24372 BSS W K24372 BSS B	K24336 BSS W K24336 BSS B
K24978 PBR W K24978 PBR B	K24371 PBR W K24371 PBR B	K24372 PBR W K24372 PBR B	K24336 PBR W K24336 PBR B
K24978 POC W K24978 POC B	K24371 POC W K24371 POC B	K24372 POC W K24372 POC B	K24336 POC W K24336 POC B
K24978 WHI W	K24371 WHI W	K24372 WHI W	K24336 WHI W
K24978 CHA B	K24371 CHA B	K24372 CHA B	K24336 CHA B
K24978 CHM W	K24371 CHM W	K24372 CHM W	K24336 CHM W
K24978 SCR W	K24371 SCR W	K24372 SCR W	K24336 SCR W



MOUNTING BOXES
FLUSH: 877 ZIC
All connection units are fitted with a 13 amp fuse (to BS1362)
TERMINAL CAPACITY
2 x 6mm² stranded (max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 1363 Pt. 4: 1995

MOUNTING BOXES
FLUSH: 877 ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded (max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS EN 60669-1: 2000

MOUNTING BOXES
FLUSH: 866 ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded (max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS EN 60669-1: 2000

MOUNTING BOXES
FLUSH: 878 ZIC
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS.3676 Pt. 1: 1989

Grid Plus Modular Frontplates Supplied with Mounting Frame

1 MODULE







2 MODULE

3 MODULE

4 MODULE

6 MODULE

8 MODULE

	1 MODULE	2 MODULE	3 MODULE	4 MODULE	6 MODULE	8 MODULE
FINISHES						
BRUSHED STAINLESS STEEL <input type="checkbox"/> STD <input type="checkbox"/> OPT	K24331 BSS	K24332 BSS	K24333 BSS	K24334 BSS	K24346 BSS	K24348 BSS
POLISHED BRASS <input type="checkbox"/> OPT <input type="checkbox"/> STD	K24331 PBR	K24332 PBR	K24333 PBR	K24334 PBR	K24346 PBR	K24348 PBR
POLISHED CHROME <input type="checkbox"/> OPT <input type="checkbox"/> STD	K24331 POC	K24332 POC	K24333 POC	K24334 POC	K24346 POC	K24348 POC
WHITE <input type="checkbox"/> STD	K24331 WHI	K24332 WHI	K24333 WHI	K24334 WHI	K24346 WHI	K24348 WHI
CHARCOAL <input type="checkbox"/> STD	K24331 CHA	K24332 CHA	K24333 CHA	K24334 CHA	K24346 CHA	K24348 CHA
CHAMPAGNE <input type="checkbox"/> STD	K24331 CHM	K24332 CHM	K24333 CHM	K24334 CHM	K24346 CHM	K24348 CHM
SATIN CHROME <input type="checkbox"/> STD	K24331 SCR	K24332 SCR	K24333 SCR	K24334 SCR	K24346 SCR	K24348 SCR

W White Inserts
B Black Inserts
 STD Standard Black or
 STD White
 OPT Option Black or
 OPT White

MOUNTING BOX
 FLUSH: : 891 ALM
 DIMENSIONS:
 86 x 86mm

MOUNTING BOX
 FLUSH: 891 ALM
 DIMENSIONS:
 86 x 86mm

MOUNTING BOX
 FLUSH: 892 ALM
 DIMENSIONS:
 86 x 146mm

MOUNTING BOX
 FLUSH: 892 ALM
 DIMENSIONS:
 86 x 146mm

MOUNTING BOX
 FLUSH: 893 ALM
 DIMENSIONS:
 146 x 146mm

MOUNTING BOX
 FLUSH: 893 ALM
 DIMENSIONS:
 146 x 146mm

LEAD TIMES
 Please contact our Customer
 Services Department on:
 01268 563000

Switch Modules 10 Amp

10 AMP SP 1 WAY	10 AMP SP 2 WAY	10 AMP SP 2 WAY PUSH SWITCH	10 AMP SP 2 WAY RED ROCKER PUSH SWITCH	10 AMP SP 2 WAY BELL PUSH SWITCH	10 AMP SP 2 WAY PRESS PUSH SWITCH	10 AMP DP 1 WAY	10 AMP 2 WAY CENTRE OFF RETRACTIVE PUSH
--------------------	--------------------	-----------------------------------	---	---	--	--------------------	---

K4881 BSS W K4881 BSS B	K4882 BSS W K4882 BSS B	K4885 BSS W K4885 BSS B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK	K4981 BSS W K4981 BSS B	K4900 BSS W K4900 BSS B
K4881 PBR W K4881 PBR B	K4882 PBR W K4882 PBR B	K4885 PBR W K4885 PBR B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK	K4981 PBR W K4981 PBR B	K4900 PBR W K4900 PBR B
K4881 POC W K4881 POC B	K4882 POC W K4882 POC B	K4885 POC W K4885 POC B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK	K4981 POC W K4981 POC B	K4900 POC W K4900 POC B
K4881 WHI	K4882 WHI	K4885 WHI	K4885 RED	K4885 B WHI	K4885 P WHI	K4981 B WHI	K4900 B WHI
K4881 CHA B*	K4882 CHA B*	K4885 CHA B*	K4885 RED B	K4885 B BLK	K4885 P BLK	K4981 CHA B*	K4900 CHA B*
K4881 CHM W	K4882 CHM W	K4885 CHM W	K4885 RED	K4885 B WHI	K4885 P WHI	K4981 CHM W	K4900 CHM W
K4881 SCR W	K4882 SCR W	K4885 SCR W	K4885 RED	K4885 B WHI	K4885 P WHI	K4981 SCR W	K4900 SCR W

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 2000

Note: Push switches are not designed for fluorescent loads
BS EN 60669-1: 2000

Note: Push switches are not designed for fluorescent loads
BS EN 60669-1: 2000


Note: Push switches are not designed for fluorescent loads
BS EN 60669-1: 2000

Note: Push switches are not designed for fluorescent loads
BS EN 60669-1: 2000



Switch Modules 20 Amp

20 AMP SP 1 WAY	20 AMP SP 1 WAY WITH WINDOW	20 AMP SP 2 WAY	20 AMP SP 2 WAY WITH WINDOW	DP 1 WAY WITH TEXT	DP 1 WAY WITH NEON AND TEXT
--------------------	--------------------------------------	--------------------	--------------------------------------	--------------------------	--------------------------------------



FINISHES

BRUSHED STAINLESS STEEL	STD	K4891 BSS W	K4891 W WHI	K4892 BSS W	K4892 W WHI	BOILER K4896 BR WHI K4896 BR BLK	BOILER K4896N BR WHI K4896N BR BLK
	OPT	K4891 BSS B	K4891 W BLK	K4892 BSS B	K4892 W BLK		
POLISHED BRASS	OPT	K4891 PBR W	K4891 W WHI	K4892 PBR W	K4892 W WHI	COOKER HOOD K4896 CH WHI K4896 CH BLK	COOKER HOOD K4896N CH WHI K4896N CH BLK
	STD	K4891 PBR B	K4891 W BLK	K4892 PBR B	K4892 W BLK		
POLISHED CHROME	OPT	K4891 POC W	K4891 W WHI	K4892 POC W	K4892 W WHI	DISHWASHER K4896 DW WHI K4896 DW BLK	DISHWASHER K4896N DW WHI K4896N DW BLK
	STD	K4891 POC B	K4891 W BLK	K4892 POC B	K4892 W BLK		
WHITE	STD	K4891 WHI	K4891 W WHI	K4892 WHI	K4892 W WHI	FAN K4896 FN WHI K4896 FN BLK	FAN K4896N FN WHI K4896N FN BLK
CHARCOAL	STD	K4891 CHA B*	K4891 W BLK	K4892 CHA B*	K4892 W BLK	FREEZER K4896 FZ WHI K4896 FZ BLK	FREEZER K4896N FZ WHI K4896N FZ BLK
						FRIDGE K4896 FG WHI K4896 FG BLK	FRIDGE K4896N FG WHI
CHAMPAGNE	STD	K4891 CHM W	K4891 W WHI	K4892 CHM W	K4892 W WHI	HEATER K4896 HR WHI K4896 HR BLK	
SATIN CHROME	STD	K4891 SCR W	K4891 W WHI	K4892 SCR W	K4892 W WHI	HOB K4896 HB WHI K4896 HB BLK	
						MICROWAVE K4896 MW WHI K4896 MW BLK	
						OVEN K4896 OV WHI K4896 OV BLK	
						TUMBLE DRYER K4896 TD WHI K4896 TD BLK	
						WASHING MACHINE K4896 WM WHI K4896 WM BLK	
						WASTE DISPOSAL K4896 WD WHI K4896 WD BLK	

- W** White Inserts
- B** Black Inserts
- STD** Standard Black or White
- STD** White
- OPT** Option Black or White
- OPT** White

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS EN 60669-1: 2000

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Additional printed modules available, see pages 148 – 156

BS.3676 Pt.1: 1989

LEAD TIMES
Please contact our Customer Services Department on: 01268 563000